



Midea MVMP Series Air Handler

MVMP Series

Cooling capacity: 18-60 kBtu/h



Contents:

1 PRODUCT LINEUP.....	2
2 NOMENCLATURE.....	2
3 SPECIFICATIONS.....	3
4 DIMENSIONAL DRAWING.....	5
5 ELECTRICAL CHARACTERISTICS.....	6
6 AIRFLOW DATA.....	9
7 ACCESSORIES.....	11
8 WIRING DIAGRAMS.....	12



Standard Features:

- High heat-transfer efficiency and low static-pressure drop A-shaped coil.
- Foil-faced insulation to prevent energy loss through the cabinet.
- Factory-sealed cabinet certified to achieve 2% or less air leakage rate at 1.0 inch water column.
- Multi-stage blower Speed Control to align with varying capacity demands.
- 4-position installation: Upflow, Horizontal Right, Downflow, Horizontal Left.
- Horizontal and vertical condensate drain pans standard, primary and secondary condensate fittings.
- Field-installed electric heater kits 5, 7.5, 10, 15, 20 kW available as accessories.
- Multiple electrical entry locations.
- Dual front panel, volute and coil with slide track, TXV with threaded connection for easy maintenance.
- Integrated filter rack with toolless door access.
- Easy-to-braze copper evaporator connection.
- TXV designed for easy piston replacement.
- All-aluminum heat exchanger extends product lifetime.
- Advanced internal welding process to reduce potential corrosion.
- AHRI and ETL listed.
- Polymer condensate drain pan with UVC inhibitor to extends product lifetime.
- Fully-insulated cabinet design.
- R454B refrigerant sensor ensures safe operation.
- R454B refrigerant sensor is factory-installed, making unit suitable for more room types and applications.

1 Product lineup

Model	MVMP18A1MN10OA MVMP24B1MN10OA MVMP36B1MN10OA MVMP48C1MN10OA MVMP60C1MN10OA
Power supply	208/230V-1ph-60Hz
Appearance	

2 Nomenclature

M	V	M	P	18	A1	M	N10	O	A
1	2	3	4	5	6	7	8	9	10

Legend		
No.	Code	Remarks
1	M	Brand: Midea
2	V	Vertical Air Handler
3	M	Multi Position installation
4	P	PSC Motor
4	18	Capacity: 18: 18 kBtu/h; 24: 24 kBtu/h; 36: 36 kBtu/h; 48: 48 kBtu/h; 60: 60 kBtu/h
5	A1	Cabinet Size
6	M	M: 208/230V 60Hz
7	N10	Refrigerant type: N10: R454B
8	O	O: Orifice (Piston) T: TXV
9	A	Design serial number

3 Specifications


	MVMP18A1MN100A	MVMP24B1MN100A	MVMP36B1MN100A
NOMINAL RATING			
Cooling (BTU/h)	18000	23000	34200
CFM (High/Low range)	600	900	1200
External Static Pressure (in.w.c) [Pa]	0.58 [145]	0.58 [145]	0.58 [145]
ELECTRICAL DATA			
Voltage / Phase(60Hz)	208V/230V-1ph-60Hz	208V/230V-1ph-60Hz	208V/230V-1ph-60Hz
Min. / Max. Voltage (V)	187/253	187/253	187/253
Min. Circuit Amps (MCA) (A)	1.8	2.5	3.3
Max. Overcurrent Protection (MOP) (A)	15	15	15
FAN MOTOR			
Motor Type	PSC	PSC	PSC
Capacitor (uF)	6	10	15
Horsepower (HP)	1/5	1/5	1/3
Rated RPM	755	820	980
Full Load Amps (FLA) (A)	1.4	2.0	2.6
FAN BLOWER			
Material	Metal	Metal	Metal
Type	Centrifugal	Centrifugal	Centrifugal
Diameter(in.) [mm]	10 [278.5]	10 [278.5]	10 [278.5]
Height(in.) [mm]	8 [207]	10 [271]	10 [271]
Coil Drain Connection FPT (in.)	3/4	3/4	3/4
EVAPORATOR COIL			
Type	Aluminum-Hydrophilic Aluminum	Aluminum-Hydrophilic Aluminum	Aluminum-Hydrophilic Aluminum
Tube Material	Aluminum	Aluminum	Aluminum
Tube Size (in.)	9/32	9/32	9/32
SOUND POWER (dB)	65	67	70
REFRIGERANT CONNECTION SIZE			
Liquid Line Size (O.D.) (in.)	3/8	3/8	3/8
Suction Line Size (O.D.) (in.)	3/4	3/4	3/4
DIMENSIONS			
Width (In.) [mm]	18-1/8 [460]	19-5/8 [500]	19-5/8 [500]
Height (In.) [mm]	41-3/8 [1050]	46-1/2 [1180]	46-1/2 [1180]
Depth (In.) [mm]	20-1/2 [520]	21-5/8 [550]	21-5/8 [550]
packaging dimension (W × H × D) (In.) [mm]	20-3/4 × 42 × 24-3/16 [527 × 1067 × 614]	22-5/16 × 47-1/8 × 25-3/8 [567 × 1197 × 644]	22-5/16 × 47-1/8 × 25-3/8 [567 × 1197 × 644]
Service Valve			
Liquid (in.)	3/8	3/8	3/8
Suction (in.)	3/4	3/4	3/4
Weight			
Net weight (lbs.) [kg]	109 [49]	130 [59]	130 [59]
Shipping weight (lbs.) [kg]	118 [54]	141 [64]	141 [64]

High-Efficiency Air Handler



	MVMP48C1MN100A	MVMP60C1MN100A
NOMINAL RATING		
Cooling (BTU/h)	45000	54000
CFM (High/Low range)	1400	1650
External Static Pressure (in.w.c) [Pa]	0.58 [145]	0.58 [145]
ELECTRICAL DATA		
Voltage / Phase(60Hz)	208V/230V-1ph-60Hz	208V/230V-1ph-60Hz
Min. / Max. Voltage (V)	187/253	187/253
Min. Circuit Amps (MCA) (A)	4.3	5.0
Max. Overcurrent Protection (MOP) (A)	15	15
FAN MOTOR		
Motor Type	PSC	PSC
Capacitor (uF)	20	20
Horsepower (HP)	1/2	1/2
Rated RPM	900	980
Full Load Amps (FLA) (A)	3.4	4.0
FAN BLOWER		
Material	Metal	Metal
Type	Centrifugal	Centrifugal
Diameter(in.) [mm]	10 [278.5]	10 [278.5]
Height(in.) [mm]	10 [271]	10 [271]
Coil Drain Connection FPT (in.)	3/4	3/4
EVAPORATOR COIL		
Type	Aluminum-Hydrophilic Aluminum	Aluminum-Hydrophilic Aluminum
Tube Material	Aluminum	Aluminum
Tube Size (in.)	9/32	9/32
SOUND POWER (dB)	71	73
REFRIGERANT CONNECTION SIZE		
Liquid Line Size (O.D.) (in.)	3/8	3/8
Suction Line Size (O.D.) (in.)	7/8	7/8
DIMENSIONS		
Width (In.) [mm]	22 [560]	22 [560]
Height (In.) [mm]	51-1/2 [1385]	51-1/2 [1385]
Depth (In.) [mm]	24 [610]	24 [610]
packaging dimension (W × H × D) (In.) [mm]	24-11/16 × 55-3/16 × 27-11/16 [627 × 1402 × 704]	24-11/16 × 55-3/16 × 27-11/16 [627 × 1402 × 704]
SERVICE VALVE		
Liquid (in.)	3/8	3/8
Suction (in.)	7/8	7/8
WEIGHT		
Net weight (lbs.) [kg]	157 [71]	165[74]
Shipping weight (lbs.) [kg]	172 [78]	179[81]

4 Dimensional Drawing

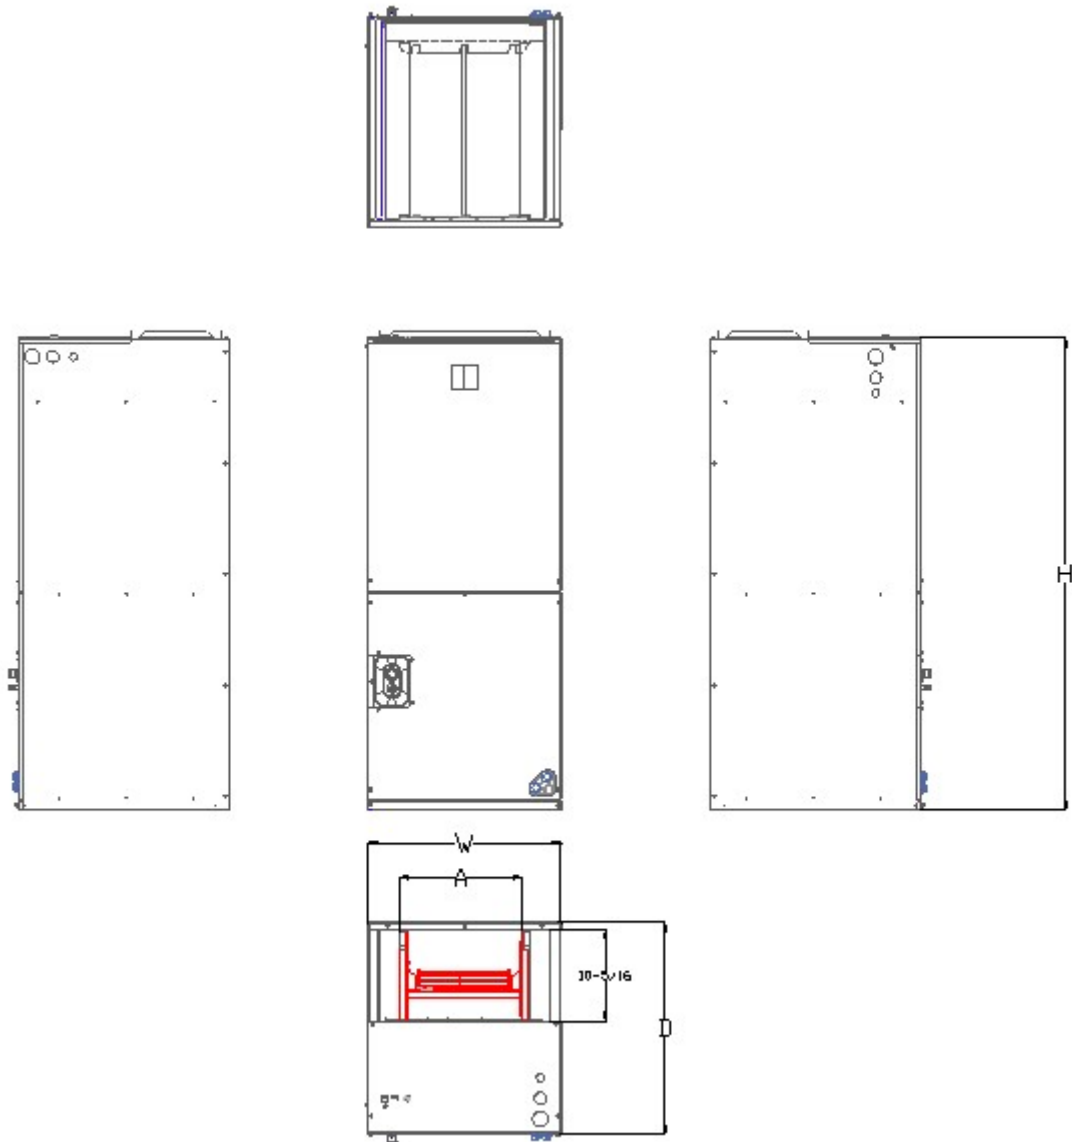

Model Size	Unit Height "H" in. [mm]	Unit Width "W" in. [mm]	Unit Length "D" in. [mm]	Supply Duct "A"	Unit Weight (lbs.[kg])
18	41-3/8 [1050]	18-1/8 [460]	20-1/2 [520]	16 [406]	109 [49]
24	46-1/2 [1180]	19-5/8 [500]	21-5/8 [550]	18 [456]	130 [59]
36	46-1/2 [1180]	19-5/8 [500]	21-5/8 [550]	18 [456]	130 [59]
48	54-1/2 [1385]	22 [560]	24 [610]	19-1/2 [496]	157 [71]
60	54-1/2 [1385]	22 [560]	24 [610]	19-1/2 [496]	165 [74]

5 Electrical Characteristics

Electric Heater Kit Breaker Information

NO.	Kit	Description	Breaker	Ref. Air Handler Use
1	EHK-05*	5kW Heater	Max. 240V, 30A, 2P	18, 24, 36, 48, 60
2	EHK-08*	7.5kW Heater	Max. 240V, 50A, 2P	18, 24, 36, 48, 60
3	EHK-10*	10kW Heater	Max. 240V, 60A, 2P	18, 24, 36, 48, 60
4	EHK-15*	15kW Heater, double breaker panel	Max. 240V, 60A, 2P Max. 240V, 30A, 2P	36, 48, 60
5	EHK-20*	20kW Heater, double breaker panel	Max. 240V, 60A, 2P	36, 48, 60

Note: Heater model number digits "": A, B, C, D, E, F, etc.

Electric Heater Kit Electrical Data (only Electric Heat)

Heater Kit Model Used	Air Handler Model	Electric Heat(kW)	Min. Circuit Ampacity (A)		Max. Fuse or Breaker (HACR) Ampacity (A)		Minimum Heating Blower Speed		
			240V	208V	240V	208V	Low	Medium	High
EHK-05*	18	5	26.1	22.6	30	25	●	●	●
EHK-08*		7.5	39.1	33.9	40	35	●	●	●
EHK-10*		10	52.1	45.2	60	50	--	●	●
EHK-05*	24	5	26.1	22.6	30	25	●	●	●
EHK-08*		7.5	39.1	33.9	40	35	●	●	●
EHK-10*		10	52.1	45.2	60	50	●	●	●
EHK-05*	36	5	26.1	22.6	30	25	●	●	●
EHK-08*		7.5	39.1	33.9	40	35	●	●	●
EHK-10*		10	52.1	45.2	60	50	●	●	●
EHK-15*		15	52.1/26.1	45.2/22.6	60/30	50/25	●	●	●
EHK-20*		20	52.1/52.1	45.2/45.2	60/60	60/50	●	●	●
EHK-05*	48	5	26.1	22.6	30	25	--	--	●
EHK-08*		7.5	39.1	33.9	40	35	--	--	●
EHK-10*		10	52.1	45.2	60	50	--	--	●
EHK-15*		15	52.1/26.1	45.2/22.6	60/30	50/25	--	--	●
EHK-20*		20	52.1/52.1	45.2/45.2	60/60	60/50	--	--	●
EHK-05*	60	5	26.1	22.6	30	25	●	●	●
EHK-08*		7.5	39.1	33.9	40	35	●	●	●
EHK-10*		10	52.1	45.2	60	50	●	●	●
EHK-15*		15	52.1/26.1	45.2/22.6	60/30	50/25	●	●	●
EHK-20*		20	52.1/52.1	45.2/45.2	60/60	60/50	●	●	●



Note: Heater model number digits "": L, M, N, O, P, Q", etc.



Electric Heater Kit Electrical Data (Electric Heat combines with Indoor motor)

Heater Kit Model Used	Air Handler Model	Electric Heat(kW)	Min. Circuit Ampacity (A)		Max. Fuse or Breaker (HACR) Ampacity (A)		Minimum Heating Blower Speed		
			240V	208V	240V	208V	Low	Medium	High
EHK-05*	18	5	27.5	24	30	25	●	●	●
EHK-08*		7.5	40.5	35.3	45	40	●	●	●
EHK-10*		10	53.5	46.6	60	50	--	●	●
EHK-05*	24	5	28.1	24.6	30	25	●	●	●
EHK-08*		7.5	41.1	35.9	45	40	●	●	●
EHK-10*		10	54.1	47.2	60	50	●	●	●
EHK-05*	36	5	28.7	25.2	30	30	●	●	●
EHK-08*		7.5	41.7	36.5	45	40	●	●	●
EHK-10*		10	54.7	47.8	60	50	●	●	●
EHK-15*		15	54.7/26.1	47.8/22.6	60/30	50/25	●	●	●
EHK-20*		20	54.7/52.1	47.8/45.2	60/60	50/50	●	●	●
EHK-05*	48	5	29.5	26	30	30	--	--	●
EHK-08*		7.5	42.5	37.3	45	40	--	--	●
EHK-10*		10	55.5	48.6	60	50	--	--	●
EHK-15*		15	55.5/26.1	48.6/22.6	60/30	50/25	--	--	●
EHK-20*		20	55.5/52.1	48.6/45.2	60/60	50/50	--	--	●
EHK-05*	60	5	30.1	26.6	35	30	●	●	●
EHK-08*		7.5	43.1	37.9	45	40	●	●	●
EHK-10*		10	56.1	49.2	60	50	●	●	●
EHK-15*		15	56.1/26.1	49.2/22.6	60/30	50/25	●	●	●
EHK-20*		20	56.1/52.1	49.2/45.2	60/60	50/50	●	●	●

Note: Heater model number digits "**": L, M, N, O, P, Q", etc.

Electric Heater Power Wiring Diagrams

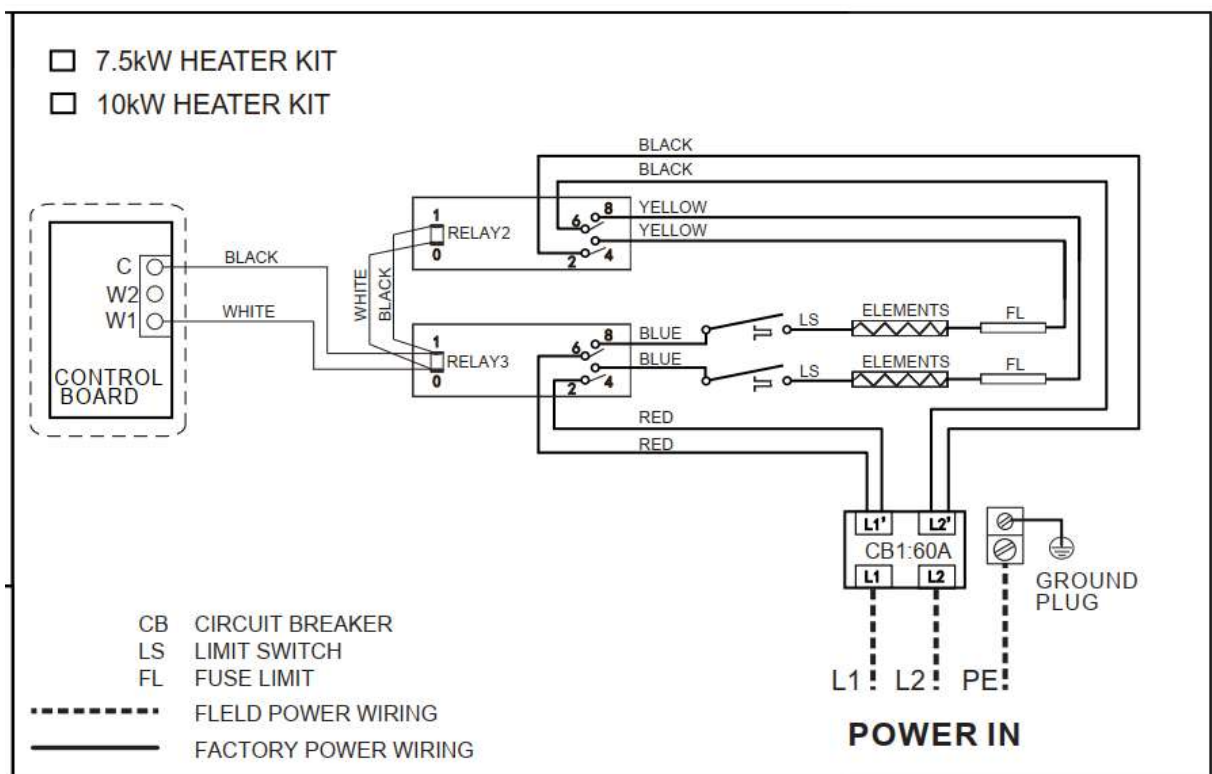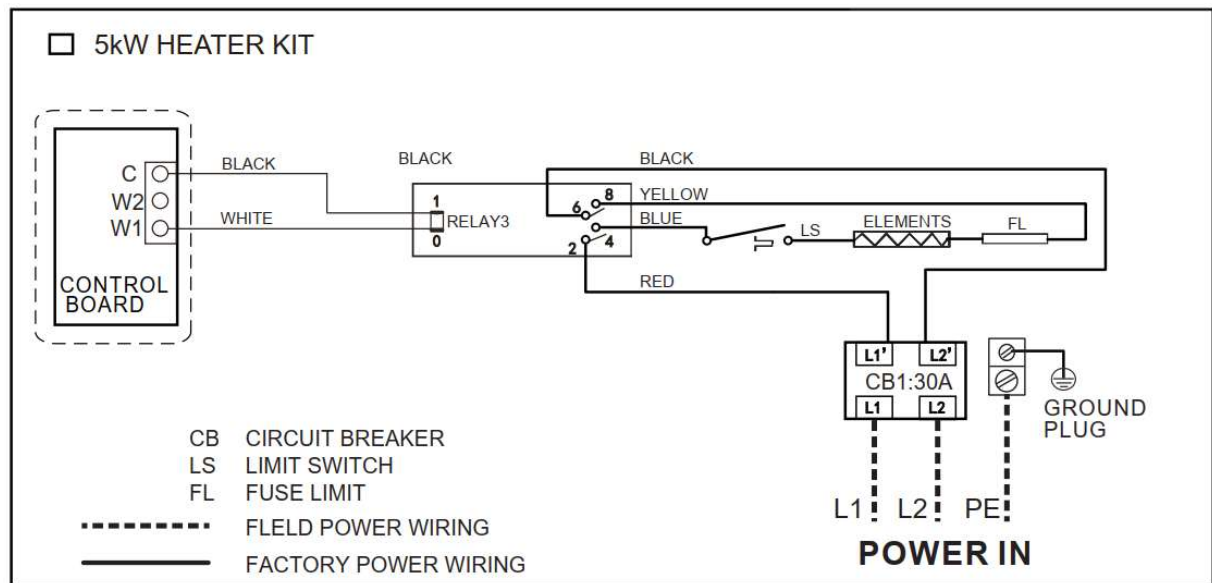

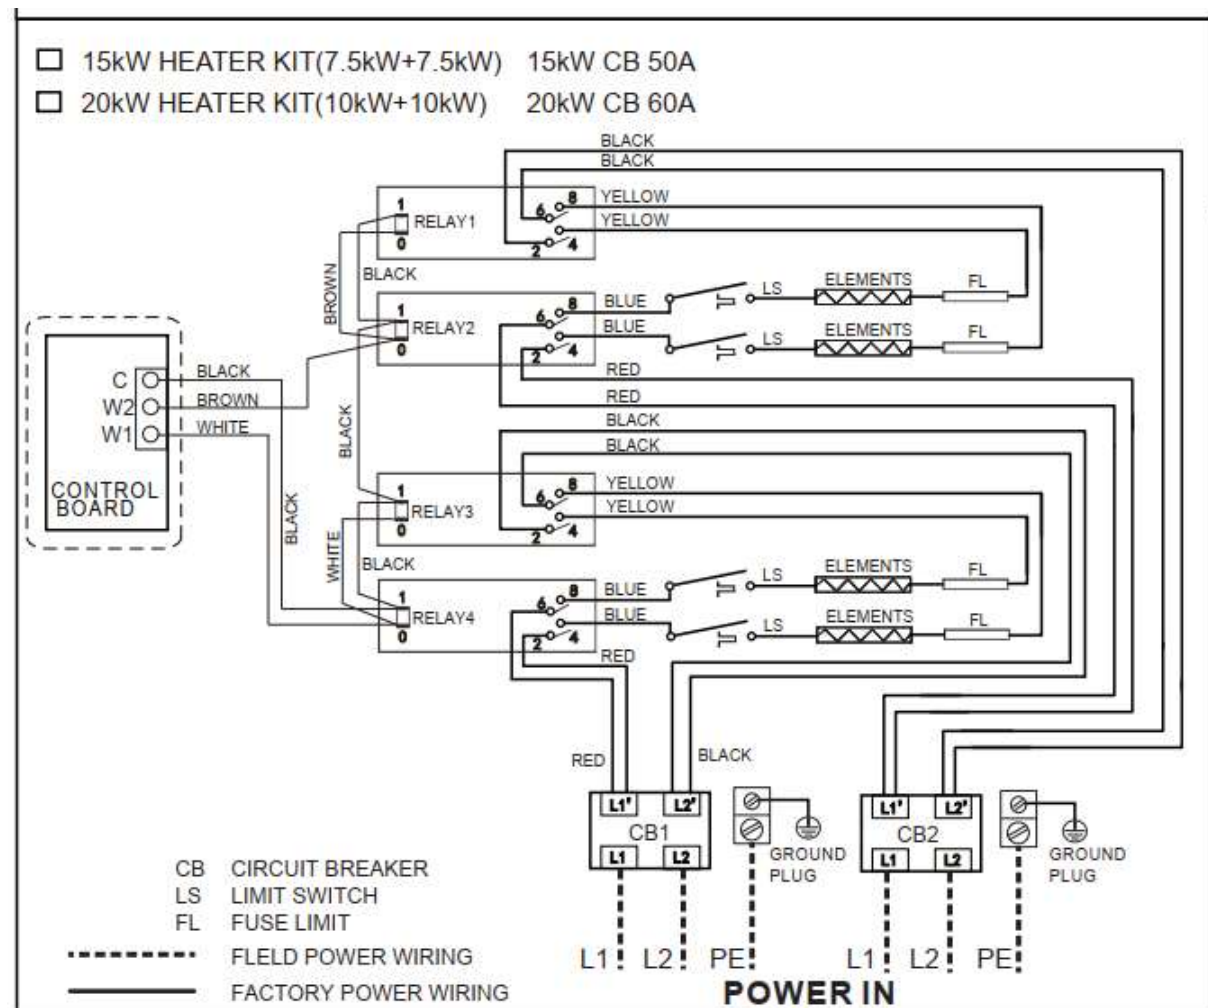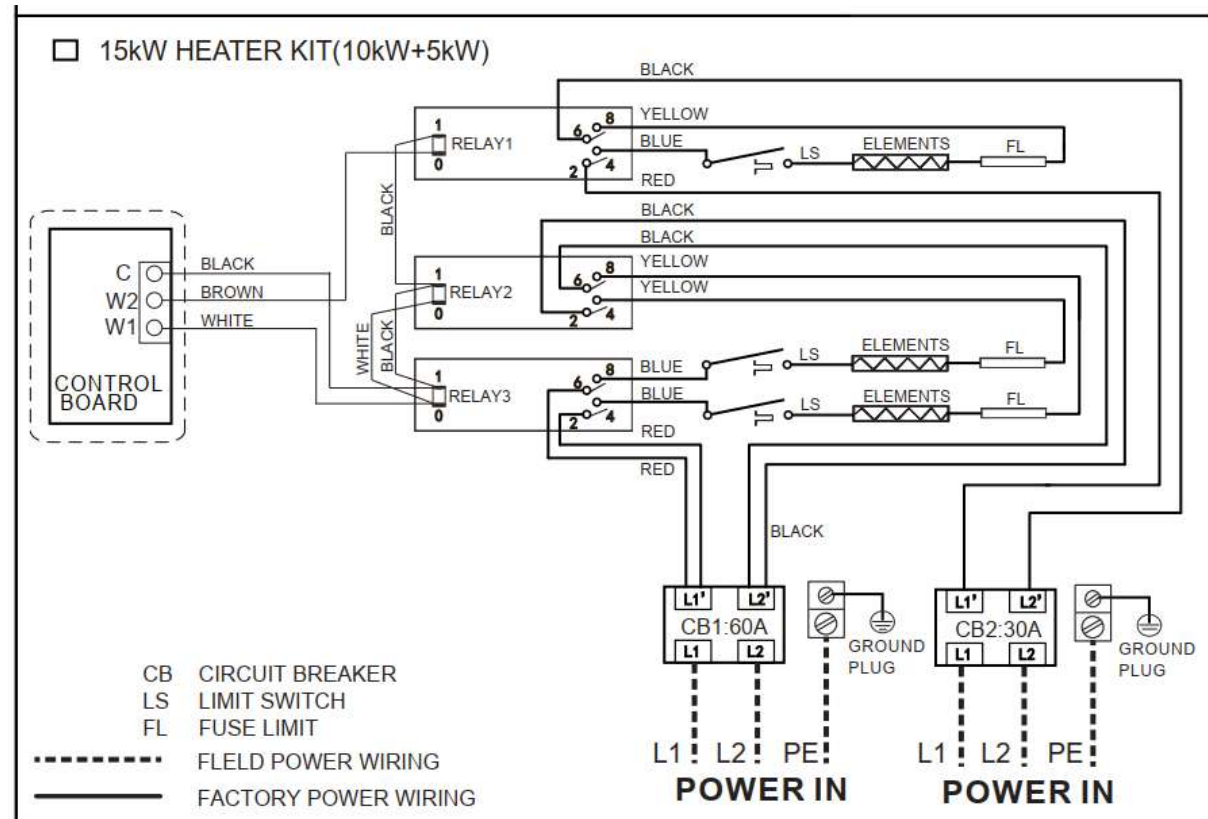

6 Airflow Data

Model Number	Outdoor Unit Size (Ton)	Motor Speed		CFM Wet Coil Without Filter and Electric Heat								
				External Static Pressure (in w.c)								
				0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
18	1.5	Low	Current / A	0.90	0.89	0.87	0.85	0.83	0.81	0.79	0.75	0.71
			Power / W	207	203	198	191	187	182	173	162	151
			CFM	649	618	586	548	509	467	420	350	283
		Medium	Current / A	1.04	1.01	0.99	0.97	0.94	0.92	0.89	0.87	0.82
			Power / W	243	236	230	224	218	210	204	198	184
			CFM	815	796	758	720	677	624	573	522	421
		High	Current / A	1.34	1.31	1.28	1.25	1.22	1.19	1.15	1.12	1.09
			Power / W	313	305	297	289	280	270	259	250	242
			CFM	945	933	897	855	811	757	692	633	566
24	2	Low	Current / A	1.28	1.25	1.23	1.20	1.17	1.14	1.11	1.08	1.02
			Power / W	289	281	274	265	253	244	234	223	206
			CFM	1081	1028	977	909	796	714	628	539	407
		Medium	Current / A	1.37	1.35	1.33	1.32	1.28	1.24	1.21	1.17	1.14
			Power / W	315	309	303	297	287	274	263	252	242
			CFM	1231	1176	1122	1068	976	851	757	659	552
		High	Current / A	1.88	1.84	1.80	1.77	1.74	1.70	1.64	1.59	1.55
			Power / W	423	409	399	389	380	364	344	329	314
			CFM	1434	1371	1311	1249	1185	1081	922	802	689
36	3	Low	Current / A	1.53	1.53	1.52	1.50	1.48	1.45	1.43	1.40	/
			Power / W	323	319	314	307	294	281	268	251	/
			CFM	1091	1048	1001	947	851	764	677	571	/
		Medium	Current / A	1.72	1.71	1.7	1.68	1.67	1.64	1.62	1.59	/
			Power / W	368	361	354	348	339	325	312	297	/
			CFM	1335	1286	1230	1172	1103	986	866	752	/
		High	Current / A	2.27	2.26	2.24	2.22	2.21	2.18	2.15	2.12	/
			Power / W	473	462	452	442	430	419	399	383	/
			CFM	1526	1467	1403	1335	1259	1181	1030	913	/
48	4	Low	Current / A	2.30	2.25	2.21	2.18	2.14	2.10	2.05	1.92	1.85
			Power / W	491	472	456	442	430	417	399	351	328
			CFM	1496	1441	1383	1326	1273	1214	1137	872	746
		Medium	Current / A	2.56	2.52	2.48	2.44	2.40	2.37	2.33	2.28	2.12
			Power / W	562	548	535	523	509	497	482	465	410
			CFM	1798	1731	1660	1597	1529	1452	1376	1283	921
		High	Current / A	3.30	3.25	3.20	3.15	3.10	3.05	3.00	2.95	2.88
			Power / W	704	689	673	656	640	624	610	593	570
			CFM	1970	1896	1819	1737	1662	1580	1501	1411	1291
60	5	Low	Current / A	2.84	2.78	2.71	2.65	2.58	2.50	2.38	2.31	2.14
			Power / W	643	626	610	594	575	555	527	508	466
			CFM	1793	1750	1691	1635	1568	1497	1390	1315	1141
		Medium	Current / A	3.11	3.03	2.97	2.9	2.82	2.74	2.64	2.49	2.41
			Power / W	713	695	680	661	642	623	598	562	542
			CFM	2041	1992	1932	1858	1786	1702	1610	1465	1379
		High	Current / A	3.58	3.51	3.43	3.35	3.26	3.17	3.06	2.88	2.81
			Power / W	818	800	780	762	741	717	692	650	631
			CFM	2157	2111	2047	1975	1894	1802	1701	1534	1455

--- Shaded boxes represent airflow outside the required 300 to 450 cfm/ton, which are not recommended.

NOTES: Airflow based upon cooling performance at 230V with no electric heat or filter. Airflow at 208V is approximately the same as 230V because the multi-tap ECM motor provides constant torque with no drop off relative to motor operating speed.

The air distribution system has the greatest effect on airflow and is in the control of the installing contractor. For this reason, the contractor should use only industry-recognized procedures.

Heat pump systems require a specified airflow for electric heat operating. Each ton of cooling requires between 350 and 450 cubic feet of air per minute (CFM), or 400 CFM nominally.

Duct design and construction should be carefully done. System performance can be lowered dramatically through poor planning or workmanship.

Air supply diffusers must be selected and located carefully. They must be sized and positioned to deliver treated air along the perimeter of the space. If they are too small for their intended airflow, they would become noisy. If they are not located properly, they cause drafts. Return air grilles must be properly sized to carry air back to the blower. If they are too small, they also can cause noise.

Installers should balance the air distribution system to ensure sufficient, quiet airflow to all spaces to ensure maximum occupant comfort.

An air velocity meter or airflow hood can be used to balance and verify branch and system airflow (CFM).

IMPORTANT:

1. If unit is converted to downflow, the airflow for model 18 must be between 350 and 450 cfm/ton.
2. When model 42 used for a mobile home, air volume should not be less than 1335 CFM.
3. When model 48 used for a mobile home, air volume should not be less than 1584 CFM.


7 Attached Fittings

Installation Fittings	Name	Appearance	Quantity	Name	Appearance	Quantity
	Indoor unit operation and installation manual		1	Sealing ring		3
	Accessory package		1	Alarm output wires		1
	Seal plug		2	Pipe Joint		1
	Hook		1			

Note: The above applies to most models however the list of included items may vary from model to model.

Before installation, confirm all the items above are present. Retain all these accessories for future use (if necessary). All fittings should be OEM factory fittings.

8 Wiring Diagram

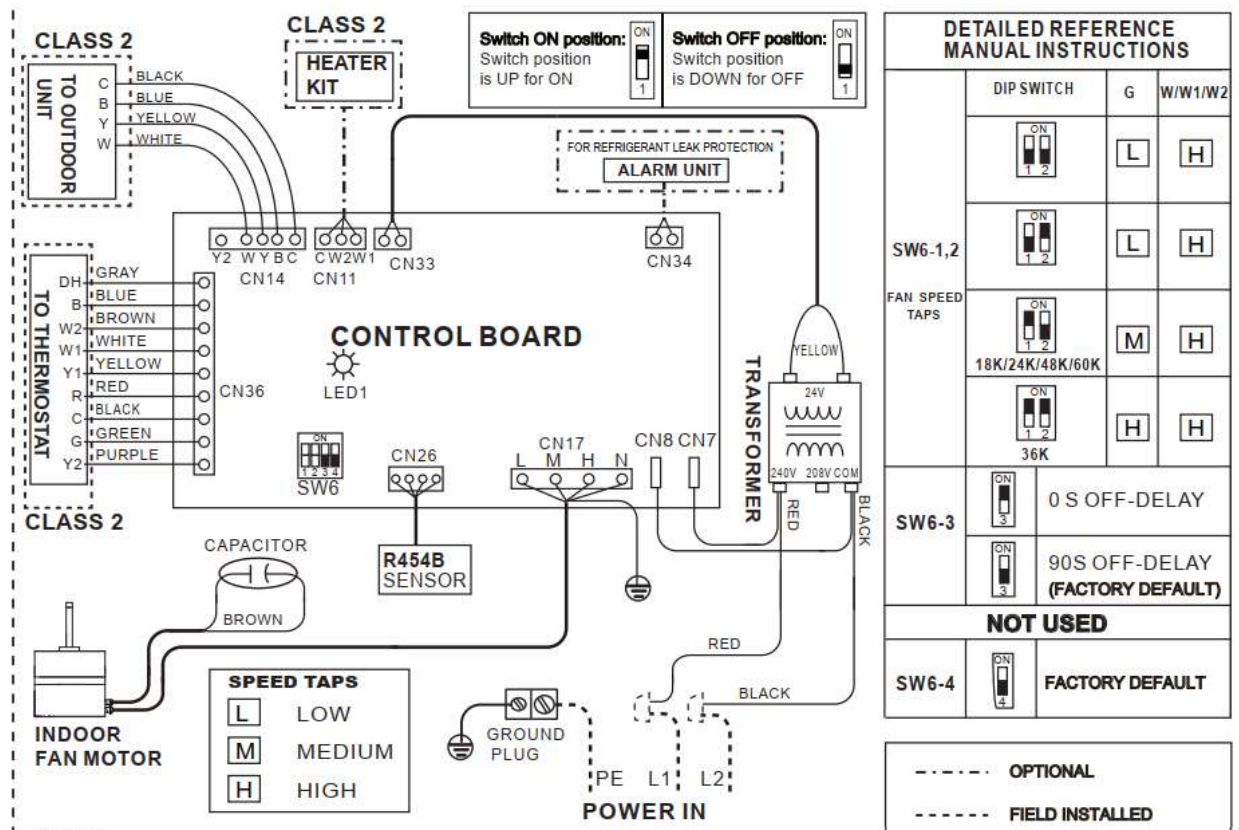

NOTES:

- 1: Connect R to R, G to G, Y to Y, etc. See outdoor instruction for details.
- 2: If some signal lines of **CN36** are not used, please wrap them up separately with **CAP**.

CAUTION:

- 1: Use copper wire (75 °C min) only between disconnect switch and unit.
- 2: To be wired in accordance with **NEC** and local codes.
- 3: If any of the original wires, as supplied, must be replaced. Use the same or equivalent type wires.
- 4: If the input voltage is 208 V, please change the transformer tap by taking the red wire to **208V** terminal.
- 5: The rated operating condition of **Alarm** is 24 VAC/1A or 30 VDC/1A or 250 VAC/1A. Please refer to the manual for wiring methods.

LED1 STATUS		CONTENT	
	STEADY ON	NORMAL OPERATION	
	OFF	POWER SUPPLY FAILURE	
	KEEP FLASHING	REFRIGERANT LEAK PROTECTION	
	3 FLASH/CYCLE	R454B REFRIGERANT SENSOR FAULT	
	4 FLASH/CYCLE	R454B REFRIGERANT SENSOR COMMUNICATION FAULT	
	8 FLASH/CYCLE	R454B SENSOR OVER SERVICE LIFE	
Factory code		Date	Revision
16023000014749		Mar. 20th, 2024	D

Midea Building Technologies Division Midea Group

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China

Postal code: 528311

mbt.midea.com/global www.midea-group.com ics.midea.com

Midea reserves the right to change the specifications of the product, and to withdraw or replace products without prior notification or public announcement. Midea is constantly developing and improving its products.

